

40" Class LED HDTV


SE40FY

- 39.5" DIAGONAL LED PANEL
- 1080P FULL HD PANEL RESOLUTION
- 60 HZ PANEL REFRESH RATE
- USB MEDIA PORT FOR MP3 AND JPEG
- 1 YEAR REPLACEMENT WARRANTY

Enjoy the best of HD digital entertainment with the Seiki 40-inch class 1080p LED HDTV. The new 2015 Seiki model features 1920 \times 1080 Full HD resolution with 60 Hz refresh rate to provide optimal picture quality and smooth motion.

The Seiki model also features advanced direct-lit LED backlight technology for superior contrast, rich colors, and high brightness video performance. Coupled with choice audio components and multiple video/audio connectivity options, the Seiki model is made to fit everyone's digital entertainment lifestyle.

For all of its 2015 HDTV models, Seiki offers its one-year replacement warranty through its 24/7 customer support.

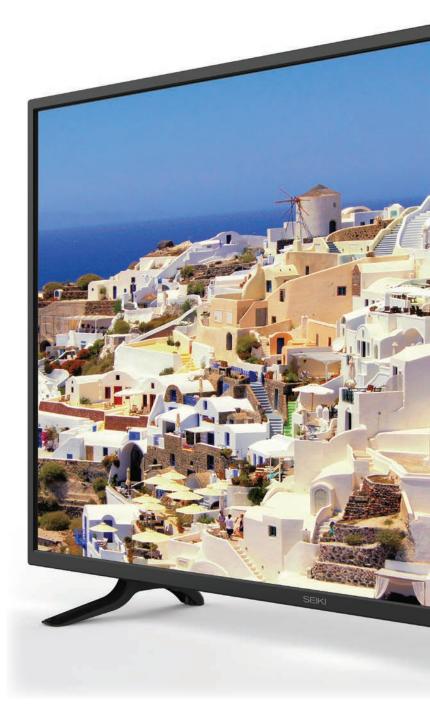

















UPC CODE: 81945611948








DIGDLAY CDECC	
DISPLAY SPECS	
Diagonal Panel Size	39.5 in
Active Area	878.11 mm (H) x 485.35 mm (V)
Aspect Ratio	16:9
Panel Resolution	1920 x 1080
Panel Refresh Rate	60 Hz
Brightness	250cd/m2
Dynamic Contrast Ratio	5000:1
Viewing Angle	178°(H) x 178°(V)
Dot Pitch	0.44 mm (H) x 0.44 mm (V)
Maximum Color	16.7 million
Response time Gray-Gray	8.5 ms

ELECTRONICS	
DNR	3D
Digital Comb Filter/Type	3D

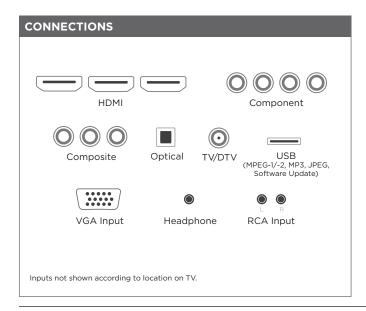

FEATURES

Built-in 3D NTSC Comb Filter

Built-in 3D Video Noise Reduction

Built-in BTSC/SAP

Over-the-air ATSC/NTSC RF Input Support

Digital/analog Channel Auto Tuning

V-CHIP Support/CCD/Favorite Channel

Component + HDMI Supports 480I, 480P, 720P, 1080I, 1080P

OSD Language English/French/Spanish

USB Support for MPEG-1/-2, MP3 Audio and JPEG Images

TV SYSTEM & VIDEO STANDARDS

TV System	ATSC/NTSC M
Channel CATV - UHF/VHF	AIR (2-69); CABLE (1-135)
Composite/C-Video Input	NTSC

VGA RESOLUTIONS

640 x 480 800 x 600 1,024 x 768 1,360 x 768 1920 x 1080

ACCESSORIES INCLUDED

Remote Control (Batteries Included)

User Manual/Warranty Card

POWER REQUIREMENTS	
Power Source	AC 100-240V 50/60Hz
Power On Consumption	<95W
Standby Consumption	<0.5W
Operating Temperature	41°F-95°F
Operating Humidity	20%-80%

WARRANTY & SUPPORT

1 Year Replacement Warranty

Toll-free 24/7 Customer Support Online Manual/Firmware Access

DIMENSIONS

