

⚠ WARNING

To prevent serious injury or death, please ensure the gate is always securely installed according to the manufacturers installation instructions and warnings


- This device is meant for **pet usage only**, this device is not designed nor created to be used as a children safety product.
- Never install this device above ground level without using the included 4 included hub caps due to potential risk of injury to child or pet. If you're installing without using the 4 screw-on hub caps then you must only install this device at the ground level. (The 4 Included Hub caps are designed to increase safety and sturdiness).
- For indoor usages only
- This device must only be used for door openings between 25" (65 cm) and 37" (95 cm) wide.
- DO NOT allow space above 2" (5.08 cm) between the bottom of the gate and the floor
- DO NOT step over the gate
- Please make sure the included 4 hub caps are securely placed at the end of each pole when fastening against a wall or door opening above a ground level floor.
- STOP using gate immediately and contact the manufacturer if any parts becoming missing or are damaged.
- Periodically check all fasteners to ensure they are tight and secure.
- Pressure-mounted gates may dislodge if significant pressure is placed during installation
- Always keep gate securely locked in a closed position. Uninstall or remove gate from opening when not in use.
- This gate cannot prevent all unintentional accidents from occurring. These instructions and warnings are put in place to help prevent any serious injury or death with proper usage
- When installing against a drywall, beam or metal frame, always make sure the mounting surface is reinforced with a wall stud or is sturdy enough to handle your pets pressurized weight

WARNING - The safety barrier must never be fitting across any windows or glass mounting surfaces

WARNING - Never install this device above the bottom / ground floor level without the 4 included wall mounting Hub Caps


Instructions and Care

1

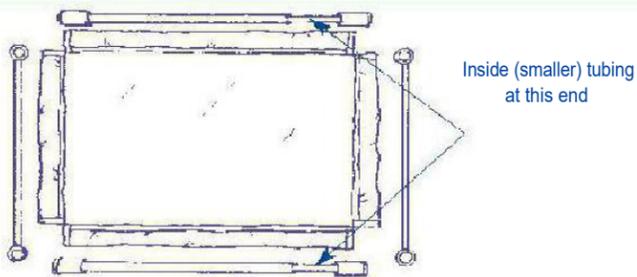


Remove fabric and poles from the box, neatly lay all pieces on a flat surface as displayed within the above diagram. Please make sure that the shorter poles and longer (adjustable) poles are facing each other.

2

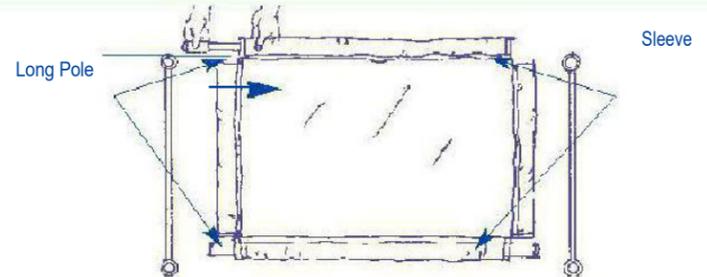


Slide / insert the longer (adjustable) poles with the rubberized end caps into the longer sleeves for both the top and bottom sleeves. Rotate the top and bottom metal bars counterclockwise to properly adjust the width of the poles under they are properly even in length.

3

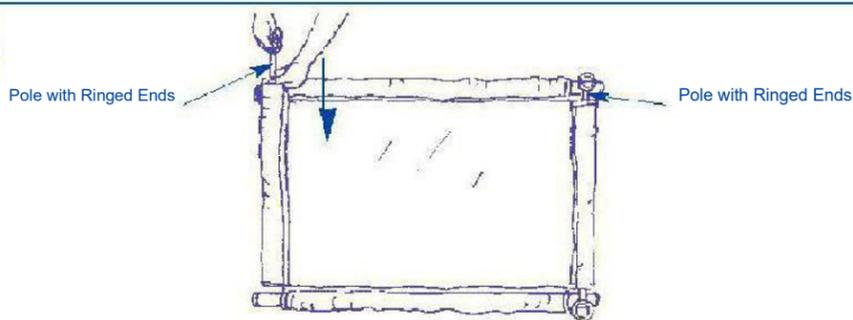

Insert the poles with the "O" shaped circular ends into the sided sleeves, as per the above diagram.


4

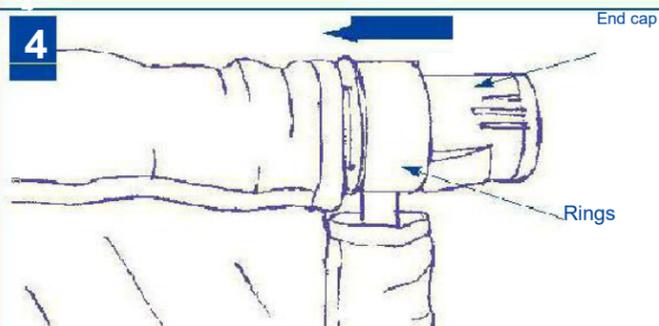

Snap rings over the end caps located on the top and bottom poles. Please make sure the rings properly snap into place on all four corners

5

Twist the rubberized gripped ends of the longer poles to adjust the width

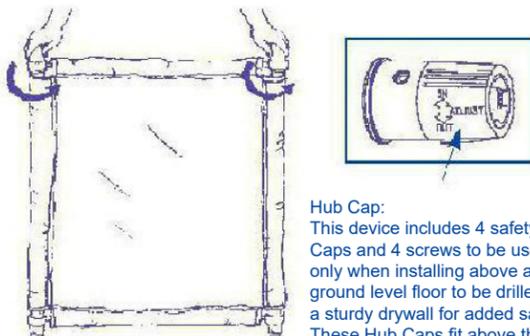


Hub Cap:
This device includes 4 safety Hub Caps and 4 screws to be used only when installing above a ground level floor to be drilled into a sturdy drywall for added safety. These Hub Caps fit above the rubberized gripped ends of the longer poles. User may also install with Hub Caps and without screws on ground-level floors.

Stand the gate facing the shorter length on the floor with the end caps of the sided ends in your hands. Then begin to twist the poles counterclockwise to increase the length of the longer (Adjustable) poles, and clockwise to decrease the pole lengths. Adjust the gate width until the tune length measures 1/2 - 1 inch wider than the installation doorway.

6


Pull back on spring-loaded tube

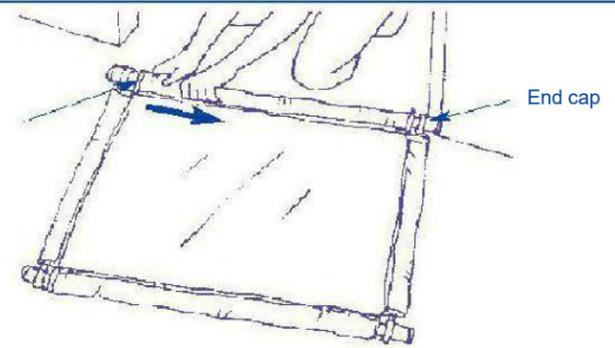

Lay gate flat on the ground with the end caps facing the bottom of the opening. Pull back on the other end of the pring-loaded tube and gently slip into the opening.

CONTINUE TO NEXT PAGE

7

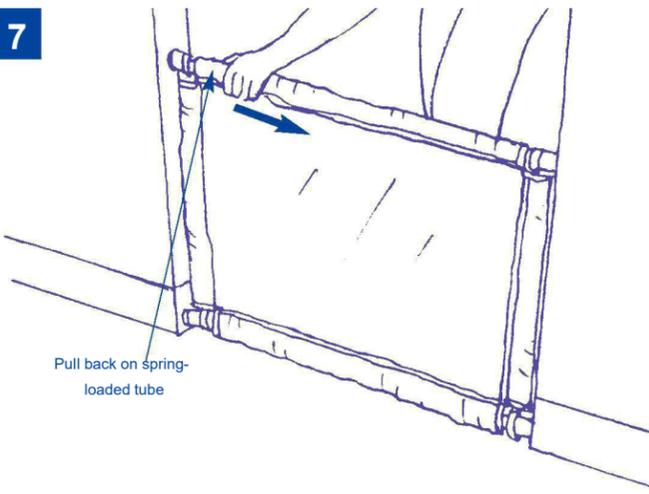

Place the gate upright and fasten the upper and bottom tubes into the doorway you're looking to install the gate into (Make sure the drywall is sturdy enough as per the warnings listed on the previous page of this manual). To increase tension to extend the poles you must turn the poles counterclockwise, to decrease tension you must twist the poles clockwise. We recommend that you do not increase tension when installed against a wall, rather decrease the tension and then re-adjust according to the width of the opening. For a more sturdier installation when installing above a ground-level floor (See section 8 for further instructions), user must drill the 4 included hub caps into a sturdy drywall and make sure the Hub Caps are properly washed both before and after usages. We recommend using rubbing alcohol to further clean the rubberized grips as this may cause damage to walls when installing on a new surface.

Always make sure that the gate is securely fastened after installation to handle the proportionate

8


When installing above a ground level using the 4 included hub caps, make sure that the opening distance is between 25" (65 cm) and 37" (95 cm) wide. After you determine proper width opening we recommend using a power drill and leveling device to properly level and install the hub caps. Make sure that you properly level and mark the placement positions of each of the hubcaps in coordination with the height of the shorter poles. Once the position is set, simply drill in place where you'd like to permanently connect the gate to. Once installed, the longer poles will automatically adjust inside the inner hub caps for added safety and stability. Simply unscrew the longer poles if you wish to collapse and travel.

Care Instructions

To clean, blot the outer surface with a damp sponge with added mild soap in cold water. If necessary, machine wash, cold, gentle cycle. Tumble dry, low. Do not use bleach. Do not dry clean and do not iron.


To Store the Soft Gate

1

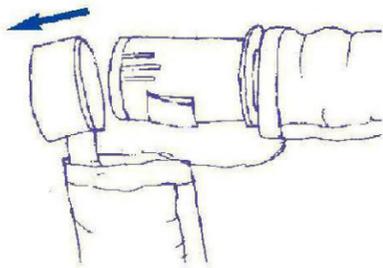


Slide rings completely off all four end caps. (DO NOT slide poles out of sleeves). NOTE: Rings may break if not removed before folding. Gate will not fold if rings are not fully removed from the end caps.

2

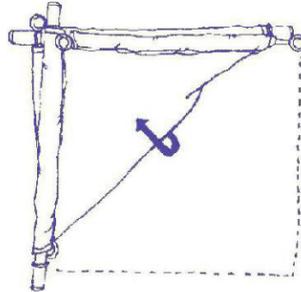

Twist end caps clockwise until horizontal tubes are in their shortest position. Holding poles at one corner, fold them across to opposite corner

3

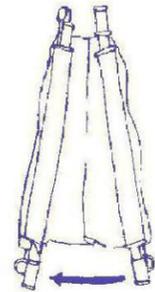

Bring poles together and gather fabric. Rotate poles to smallest length.