

3. Insert the plastic sleeve holding the batteries into the battery chamber negative end down.
4. Screw on flashlight end of the HALO flashlight.

#### Limited Warranty

HALO2CLOUD, LLC warrants its products to be free from defects in material and workmanship under normal use. Conditions are as follows:

- During the first 1 year from date of purchase, HALO2CLOUD, LLC will repair or replace the defective product.
- HALO2CLOUD, LLC will, subject to inspection, repair the defective product or replace it with a new or reconditioned unit. The return must be accompanied by a Return Materials Authorization (RMA) number to be issued upon request, and must be shipped prepaid. A shipping rebate will only be extended to the customer in the event that a defect in material or workmanship is confirmed.
- Warranty is void if the product has been improperly handled or misused in any way, or if the label and/or bar-coded warranty label has been removed or tampered with.
- Warranty returns require a check for \$14.95 for processing and handling made payable to HALO2CLOUD, LLC.
- Where applicable, all requests for warranty returns must be accompanied by a proof of purchase and be sent to HALO2CLOUD, LLC ([www.halo2cloud.com](http://www.halo2cloud.com)).
- The warranty does not extend to the electronic equipment that is used or which incorporates with any of our products and accessories. HALO2CLOUD, LLC shall not be held responsible for the improper use of its products.

To contact us, email us at [support@halo2cloud.com](mailto:support@halo2cloud.com) or call 888-907-6274


HALO2CLOUD, LLC  
148 Eastern Boulevard, Suite 210  
Glastonbury, CT 06033  
[www.halo2cloud.com](http://www.halo2cloud.com)



## HALO Telescopic Flashlight



## Operating Instructions

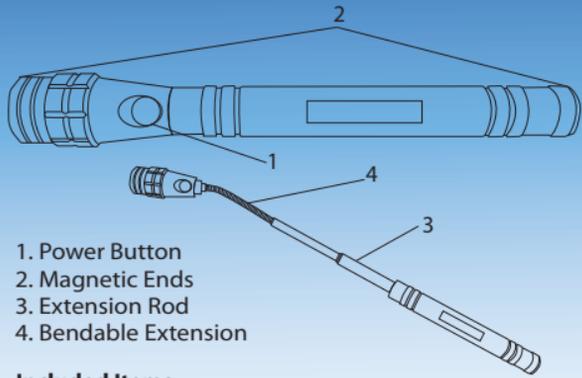

1. Power Button
2. Magnetic Ends
3. Extension Rod
4. Bendable Extension

### Included Items

- 1 HALO Telescoping Flashlight (4 Batteries included)
- Operating Instructions/Warranty

### Getting Started

Unscrew the flashlight end of the HALO flashlight and remove the plastic cover protecting the batteries (batteries included).

### To Turn On/Off the HALO Telescoping Flashlight

Press the black power button found on the side of the HALO flashlight to turn the device on. Pressing the black power button again will turn the HALO flashlight off.

### HALO Telescoping Flashlight Features

#### Extension Feature

To use the extension feature of the HALO flashlight simply grab the body of the flashlight with one hand and the flashlight tip with the other hand and pull the extension out to the desired level. Once the HALO flashlight is at the desired extension level, using the bendable portion of the extension you can change the position of the flashlight tip.

### Magnet Feature

Both ends of the HALO flashlight have a built in magnet. To use this feature simply place either of the flashlights magnetic ends against a metal object or surface. There are a number of ways that this feature can be used to help solve your everyday problems.

### Storing/Handling/Cleaning the HALO Telescoping Flashlight

- Do not get wet or store in extreme temperature conditions.
- Do not disassemble the HALO flashlight or attempt to repair it.
- Use a soft cloth with soap to clean the exterior of your HALO flashlight. Do not use liquid detergent or chemicals of any kind.

### Safety Precautions

- This HALO flashlight has been designed and manufactured to ensure personal safety. Please read the following carefully before using.
- Carefully read the operating instructions, and use the HALO flashlight correctly and for appropriate uses.
- Batteries should be recycled or disposed of as per state and local guidelines.

### Replacing the Batteries

1. Unscrew the flashlight end of the HALO flashlight. Remove plastic sleeve that holds the batteries and slide out batteries. Old batteries should be recycled or disposed of as per state and local guidelines.
2. Replace the four LR44 button cell batteries by following the arrow guide on the sleeve and inserting the negative end first.

