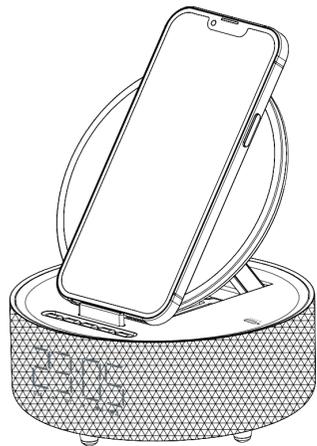# GRIFFIN™

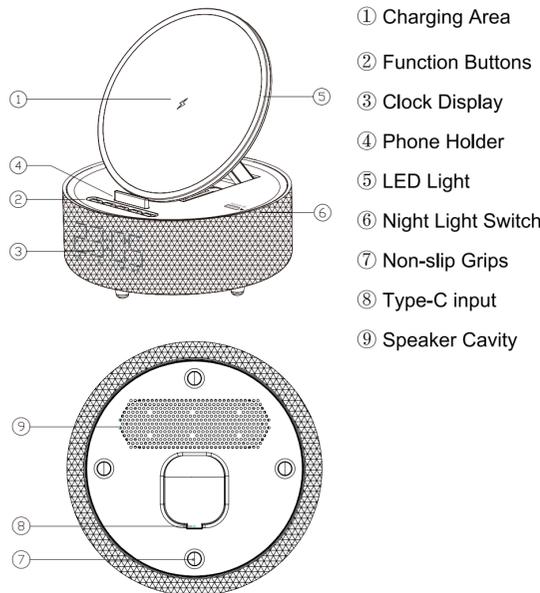## WIRELESS CHARGING SPEAKER
15W WIRELESS ALARM CLOCK CHARGING DOCK WITH SPEAKER
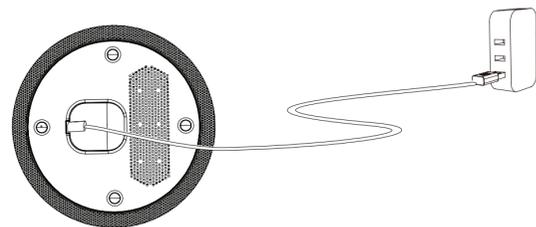

PRODUCT LAYOUT
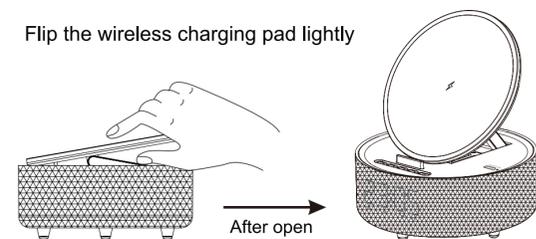

① Charging Area
② Function Buttons
③ Clock Display
④ Phone Holder
⑤ LED Light
⑥ Night Light Switch
⑦ Non-slip Grips
⑧ Type-C input
⑨ Speaker Cavity

SETTING UP YOUR SPEAKER

1. Connect the USB port of the USB data cable to the power adapter and the Type-C port to the Type-C input
2. After the Alarm Clock is powered on, the charging indicator light "●" flashes, and the light stops flashing when fully charged.
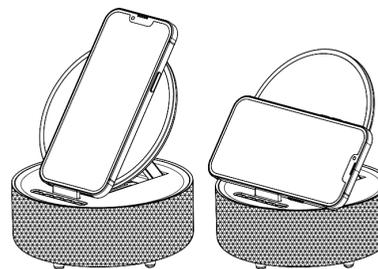

Flip the wireless charging pad lightly
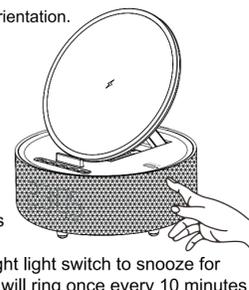

After open

WIRELESS CHARGING

Place your wireless charging compatible device in the indicated charging area of the alarm clock. If device properly placed, charging indicator ⚡ will turn on to indicate device is charging.
Charging indicator ⚡ will turn off when the device is finished charging.

Charge in either portrait or landscape orientation.

NIGHT LIGHT FUNCTION

- Tap switch to turn on/off night light.
- Hold switch to adjust light brightness and darkness.
- When the alarm goes off, tap the night light switch to snooze for 5 minutes. When snoozed the alarm will ring once every 10 minutes four times. Hold Ⓜ to turn off the alarm.
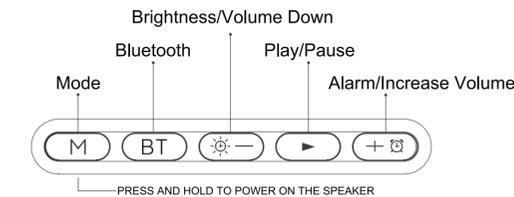

INSTRUCTIONS FOR WIRELESS SPEAKERS

When the power cord is plugged in, tap ⒷⓉ , there will be a prompt tone, Bluetooth function will be turned on. In the pairing state turn on the Bluetooth function of your phone, in Bluetooth devices, **GP-210** appears in the search for Bluetooth Speaker. Click to select the device name of **GP-210**. Automatically enter the pairing, after the pairing connection is successful, there will be a prompt tone. Hold down ⒷⓉ again to exit the Bluetooth function.

While the speaker is playing:
Press ► to Play/Pause.
Hold ► to disconnect and hold down again to restore the connection.
Press ☼ — to reduce the volume; press and hold ☼ — to switch to the previous song
Press ➕🕐 to increase the volume; press and hold ➕🕐 to switch to the next song

NAVIGATING SETTING MODE

Brightness/Volume Down
Bluetooth
Play/Pause
Mode
Alarm/Increase Volume

PRESS AND HOLD TO POWER ON THE SPEAKER

In setting mode, you will be able to adjust the time, date, 12/24 hour configuration, and schedule up to 2 alarms.

You will need to cycle through to your desired option using the Ⓜ MODE button. Pressing Ⓜ MODE once will allow you to set the time. While the clock is flashing, if you press Ⓜ MODE a second time will allow you to set the first alarm and so forth.

Ⓜ MODE

- Lift the wireless pad up to reveal function buttons
- Cycle 1 - Press M button once to set clock time
  - Hours will blink first, hit M again to adjust the seconds
  - Use +/clock icon to increase time, use -/light icon to decrease time
- Cycle 2 - Press M button twice quickly to set time for Alarm 1
  - Hours will blink first, hit M again to adjust the seconds
  - Use +/clock icon to increase time, use -/light icon to decrease time
- Cycle 3 - Press M button three times to set time for Alarm 2
  - Hours will blink first, hit M again to adjust the seconds
  - Use +/clock icon to increase time, use -/light icon to decrease time
- Cycle 4 - Press M button four times to select 12H or 24H clock – hit +/clock button to switch between 12 and 24 hour
- Cycle 5 - Press M button five times to set year
  - Use +/clock icon to increase, use -/light icon to decrease
- Cycle 6 – Press M button six times to set month/day
  - Use +/clock icon to increase, use -/light icon to decrease
- When you are done adjusting – you can continue to hit M button to cycle through back to the clock or if you leave it after 10 seconds it will revert back

- Alarm 1 - Press and hold +/clock button until you hear the beep and alarm 1 icon appear under the time
- Alarm 2 - Press and hold +/clock button until you hear the beep and alarm 2 icon appear under the time
- Alarm 1 + 2 – Press and hold +/clock button until you hear the beep and alarm 1 and 2 icons appear under the time
- To turn off alarms – press and hold +/clock until both icons disappears

ⒷⓉ BLUETOOTH BUTTON

- Press ⒷⓉ switch to access bluetooth.
- Hold ⒷⓉ to cycle display, clock→month/day, hold button again to close cycle and return to clock display.

☼ — BRIGHTNESS/VOLUME DOWN

- Press ☼ — to adjust the brightness of the screen to cycle from high/medium/low/Off.
- In setting mode, press ☼ — to reduce the number.

► PAUSE/PLAY

- Pause/play while in music mode.

➕🕐 ALARM/INCREASE VOLUME

- In setting mode, tap ➕🕐 to increase the number.
- Hold to turn on Alarm 1→Alarm 2→Alarm 1 and 2 Close sequential loop Alarm Clock icon on the digital display screen indicates that the alarm clock is on.
- Alarm clock rings once every 10 minutes and repeats four times.
- Hold the Ⓜ key to stop the alarm, tap the Ⓜ button or tap the night light switch to snooze for 5 minutes.

DEVICE COMPATIBILITY

This speaker supports fast wireless charging and complies with Qi wireless charging standards. Using a 20W output adapter, wireless charging supports up to a 15W load. This speaker also uses over voltage and over temperature protection for your device.

Works with: iPhone 14 series, iPhone 13 series, iPhone 12 series, iPhone 11 series, Samsung S23 series, Samsung S22 series, Google Pixel 7 series, and other Qi compatible devices.

CARE & MAINTENANCE

- Do not use or store the speaker in direct sunlight or high temperature places for a long time.
- Do not charge in places too close to magnetic cards, magnetic recording media, and precision instruments.
- Do not disassemble or modify this speaker.
- Do not touch the AC adapter with wet hands.
- Keep this product away from water or other liquids.
- If you want to clean the product, please disconnect the power. Spot clean only; do not use harsh chemicals.
- Speaker works in environments at -20~45°C temperature range.

SPECIFICATIONS

Material: Imported ABS + Hardware
Power input: DC5V/2.0A   9V/2.1A
Charging efficiency: ≥75%
Power: 5W/ 7.5W/ 10W/ 15W
Battery capacity: 1800mAh
Weight: 508g
Speaker power: 4Ω5W
Product size: 151x151 X 71 mm

WARRANTY INFORMATION

Guaranteed for Life covers the reasonable lifespan of this product which is five (5) years from date of purchase.
Visit griffintechnology.com/pages/warranty-and-returns

FCC WARNING

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution: The user is cautioned that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
—Reorient or relocate the receiving antenna.
—Increase the separation between the equipment and receiver.
—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
—Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

WARNINGS

1. To reduce the risk of fire or electric shock, do not expose this product to rain or moisture.
2. Do not expose this apparatus to dripping or splashing, and do not place objects filled with liquids, such as vases, on or near the apparatus. As with any electronic product, use care not to spill liquids into any part of the product. Exposure to liquids may create a failure and/or fire hazard.
3. Do not place open flame sources, such as lighted candles, on or near the product.
4. Do not subject batteries to mechanical shock.
5. In the event of a battery leaking, do not allow the liquid to come in contact with the skin or eyes. If contact has been made, wash the affected area with copious amounts of water and seek medical advice.
6. Do not use any charger other than that specifically provided for use with the equipment.
7. Do not leave a battery on prolonged charge when not in use.
8. After extended periods of storage, it may be necessary to charge and discharge the batteries several times to obtain maximum performance.
9. Batteries give their best performance when they are operated at normal room temperature 68°F (20°C) ± 9°F (5°C).
10. The battery provided with your system is not user serviceable.

CAUTION: Do not make unauthorized alterations to the product; doing so may compromise safety, regulatory compliance, system performance, and may void the warranty.

🚫 WARNING: Contains small parts which may be a choking hazard. Not suitable for children under age 3.

⚠ WARNING: This product contains magnetic material. Contact your physician if you have questions on whether this might affect the operation of your implantable medical device.

♻ **Li-ion** Removal of the rechargeable lithium-ion battery in this product should be conducted only by a qualified professional.

Made in China