

HOTEL SPA[®]



ULTRA-LUXURY 3 WAY SHOWER

If you have installation problem or defective part, please DO NOT return this product back to the retailer before calling our Toll Free Help Hotline first. We can probably solve it.

To Use 3 way Water Diverter

To change water flow, turn Diverter Switch 90° with Lever pointing in the shutoff direction. Point Lever STRAIGHT to use Hand Shower, DOWN to use Shower Head or UP to use combination of both.


To Raise, Lower or Angle Hand Shower

Push and hold Button Knob to raise, lower or swivel across Hand Shower on Slide Bar. Release Button Knob to lock Bracket in position. Rotate Bracket's Holder in vertical directions to set desired Hand Shower angle.

To Use 5-function Shower Head and Hand Shower Dial

Turn Dial Rim to select desired water pattern for each shower. Choose from 3 full or 2 combination settings.

When changing Shower Head settings, always turn Dial Rim CLOCKWISE or hold Shower Head with free hand to prevent accidental loosening of Diverter connection.

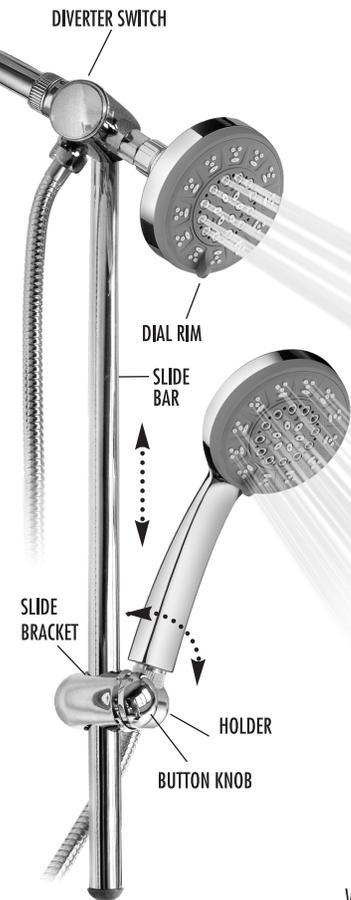

If desired, HotelSpa[®] 3 way Multi-Shower can be used without Slide Bar by using Rotatable Holder as Angle Adjustable Hand Shower Bracket



FIVE YEAR LIMITED WARRANTY

InterLink will repair or replace any of this product's parts that exhibit defects in workmanship or materials for five years from date of purchase. If malfunction occurs, send only defective part(s) with a letter describing the problem, shipping prepaid, to Customer Service Department at the address listed here. Wrap carefully to prevent shipping damage. You must include proof of purchase or you can register your warranty by mailing your name, address and proof of purchase to our Customer Service Department. Your warranty does not cover malfunction or damage due to accident, misuse, or failure to follow any written instructions accompanying this product.

For Questions on Installation or Part Replacement

Call Toll Free **1-888-869-4010**



Monday - Friday 9:00 AM - 4:00 PM EST

Interlink Products International, Inc. 1315 E. Elizabeth Ave., Linden, NJ 07036

Made in China ipshowers.com

To Connect

1. Remove old shower head. Screw Lock Nut, with thicker wall end facing YOU, onto shower arm to end of its thread, but DO NOT tighten (Fig. 1).
2. Screw Water Diverter onto shower arm, stopping at last possible position when Hose Outlet is facing DOWN (Fig. 2).
3. Counter-tighten Lock Nut in reverse direction, until it presses tightly against Diverter, thereby locking it in this position.
4. Screw Shower Head with Thick Washer onto Diverter.
5. Turn ON water to test connection. If leakage occurs, disconnect Diverter and add Thin Washer (spare) to Thick Washer already inside its neck, then reconnect (Fig. 3). Attach Slide Bar ONLY after Diverter connection has been tested for leakage (see below).

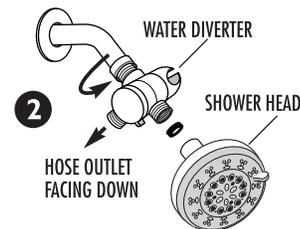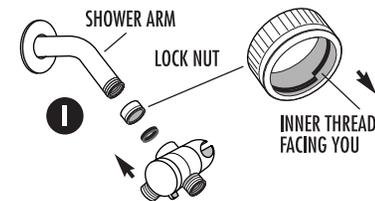

Hand tighten connections ONLY. DO NOT use wrench or pliers

DO NOT overtighten - this may cause washer to bend and be pushed into shower arm. Use plumber's tape ONLY if needed and ONLY on shower arm thread, if washers fail to stop leakage. DO NOT use plumber's tape on any other connections.

If Leakage Occurs, Check All Washers

- 1 Thick Washer inside Diverter neck with 1 Thin Washer (spare), if needed
- 1 Thick Washer inside Shower Head nut
- 2 Medium Washers, One in each Shower Hose nut

To Attach Slide Bar and Connect Hand Shower

1. Make sure that Rotatable Holder is positioned with wider Slot opening on TOP and narrow Slot opening on BOTTOM (Fig. 4).
2. Insert open end of Slide Bar from BOTTOM into narrow Slot opening and push through wider Slot opening of Holder (Fig. 5).
3. Insert Conical Endcap over open end of Slide Bar until it COMPLETELY reaches its inner top wall (Fig. 5). There should be NO gap between Slide Bar and inner top wall of Endcap (Fig. 5A) as it will not hold properly.
4. From TOP, push Slide Bar end with Conical Cap DOWN (Fig. 6) to lock tightly in Holder Slot (Fig. 7).
5. Screw short Hose nut with Medium Washer in place onto Hose Outlet (Fig. 8). Screw long Hose nut with Medium Washer in place onto Hand Shower handle and place Hand Shower into Slide Bracket.

